

FirePro Systems Limited

6 Koumandarias & Spyrou Araouzou Street
 Tonia Court No.2, 6th Floor, CY-3036 Limassol
 P. O. Box 54080, CY-3720 Limassol, CYPRUS
 Tel: +357 25 379 999, Fax: +357 25 354 432

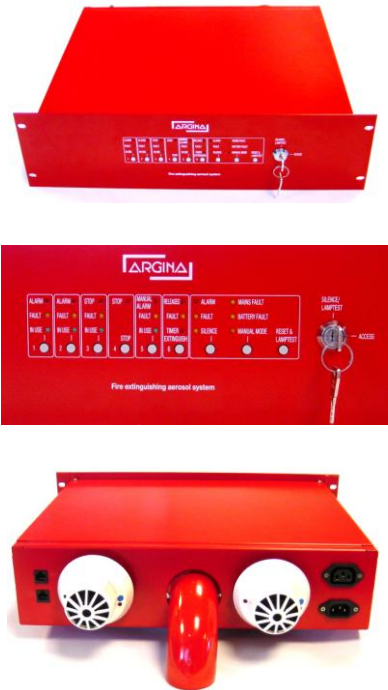
Web: www.firepro.info, email: mail@firepro.info

An ISO 9001:2008 & 14001:2004 registered company

FirePro®

Manufacturer &
 Worldwide Supplier of
 Fire Extinguishing
 Aerosol Systems

Technical Data Sheet

<p>19" PCSU FP-200/A2</p> 	TECHNICAL INFORMATION	
	Model	19" Patch Cabinet Safety Unit FP-200/A2
	Power required	230 V
	Model FirePro® inside	FP-200S Cold
	Extinguishing agent content	146 g effective
	Detection by means of	Two detector dependent optical/ionisation smoke detector. On request single detector thermal detection T 58 °C
	Standard controls	Continuous line monitoring, maximum 5 mA Tripping of mechanical ventilation Floating contact Variable delay of 5 – 15 - 30 seconds
	Operational discharge time	10 - 15 seconds
	Discharge outlets	1
	Discharge length	± 2000 mm
	Size exc. front plate	H x W x L: 140 mm x 430 mm x 450 mm
	Weight gross	9700 g
	Fire class	A, B, C, F
	For additional information	Installation manual available with every product
	APPLICATIONS	
Enclosed hardware with a max volume to 2 m ³	19" patch cabinets Telephone exchange	

